


WATER CONSERVATION SCHMATIC

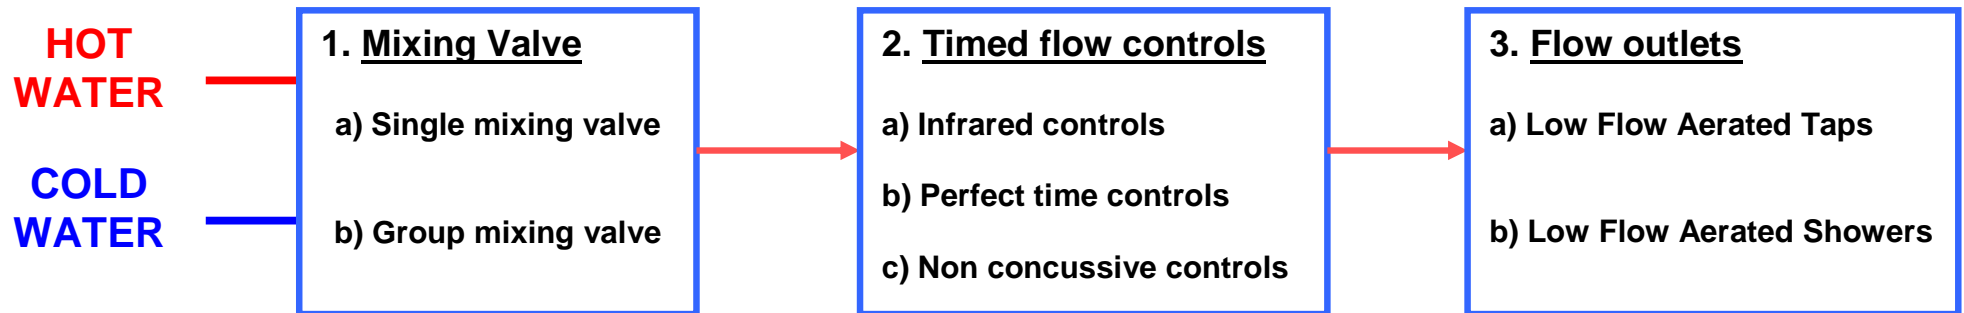

1) Mixing Valve: mixes hot and cold water to the desired temperature. Available either as a single valve for a single outlet or as a single valve to supply to a number of outlets (max.5).

2) Timed Flow Controls: controls the time water will flow and will automatically switch off to ensure water is not left running unnecessarily; available in the following options:

- a) Infrared – fully automatic with no input required from the user.
- b) Perfect time – only requires user to touch a touch sensitive surface (only available for taps).
- c) Non concussive – requires user to push in a mechanical button.

3) Flow outlets:

- a) Tap aerator reduces flow from normal 12 L/min to 2.5 L/min by aeration of the water (only available on infrared and perfect time taps).
- b) Low Flow showerhead reduces flow from normal 12 L/min to below 6 L/min by aeration of the water.



For further information or to arrange for a site survey contact:

Tel: 01795 890590

E-mail: sales@bwater.eu

Website: www.bwater.eu